



Contact us

- **6** 02-1016710
- Iumbinaire@gmail.com
- Line ID : @lumbinaire
- www.lumbinaire.com

"กลาวคืนไม่มีวันมืดมิด..ตราบดววอาทิตย์ไม่สิ้นแสว"

LumBinaire Solar Lamp

CBS (Complete Built-in Set)

SL-06-0004 DAY SL-06-0005 WARM

SL-06-0001 DAY

SL-06-0002 WARM

SL-05-0004 DAY SL-05-0005 WARM

> SL-05-0001 DAY SL-05-0002 WARM

SL-05-0008 DAY SL-05-0009 WARM

LumBinaire

SL-07-0001 DAY SL-07-0002 WARM

> SL-03-0001 DAY SL-03-0002 WARM



"กลางคืนไม่มีวันมืดมิด..ตราบดวงอาทิตย์ไม่สิ้นแสง" LumBinaire Solar Lamp

คุณสมบัติ

- 🗸 แพมโซลาร์เซลล์แบบ Monocrystalline เกรด A
- 🗸 แบตเตอรี่ ลิเรียมใอออน LIFEPO4 อายุการใช้มานยาวนาน
- 🗸 ไฟแอลอีดีอายุการใช้มานมากกว่า 50,000 ชั่วโมม
- 🗸 วัสดุทำจาก อลูมิเนียม ไม่เป็นสนิม
- 🗸 ใช้กระแสไฟ DC ไม่ต้องกังวลเรื่องไฟช้อต ไฟรั่ว ไฟดูด
- 🗸 ให้แสมสว่ามจากหลอดไฟ เทียบเท่าหลอดไส้ 40 วัตต์
- 🗸 เหมาะกับวานติดตั้วกลาวแจ้ว

คุณประโยชน์

- 🗸 ติดสว่ามทั้งคืน
- ไม่เพิ่มภาระค่าไฟแม้แต่บาทเดียว
- 🗸 ติดตั้งว่าย เคลื่อนย้ายสะดวก
- ไม่ต้อมดินสายไฟ ไม่ต้องจ้างช่าง
- 🗸 ไม่สิ้นเปลือวอุปกรณ์ สวิทซ์ ปลิ๊ก สายไฟ ฯลฯ

รับประกันคุณภาพนาน 3 ปีเต็ม










Showroom @ CDC



PRODUCT CODE: SL-02-0001 DAY







TECHNICAL SPECIFICATION

LED POWER:5 WattsMATERIAL:AluminiumBATTERY:2 x 4.5Ah 6.4VLUMENS:700 LumensPV PANEL:8 Watts Grade AAUTONOMY:23 hoursCHARGING:6 hours / dayWARRANTY:3 Years



SOLAR FLOOD LIGHT

ALL IN ONE solar flood light, which integrates solar panel, LED lamp and the gel acid battery into a single product. Easy Installation.



23 HOURS AUTONOMY

Smart power management: 4 rainy days back up.



AUTOMATIC OPERATION

Fully automatic operation: Day & Night detection, automatic power On & Off.



ENVIRONMENT

Green energy: 0 Carbon dioxide emissions.



LED LIGHTING

5 W high efficiency LED from BRIDGELUX.



SOLAR PANEL

8 W Monocrystalline Solar Panel, GRADE A Solar Cells.



LIFEPO4 BATTERY

2 x 4.5 Ah Gel Cell Deep Cycle Battery specially customized for solar application.



DIE CASTING ALUMINIUM

INTERPON AKZONOBEL painting, Salt Spray and Corrosion Resistant.



WATER PROOF















PRODUCT CODE: SL-03-0001 DAY SL-03-0002 WARM



TECHNICAL SPECIFICATION

LED POWER:3.5 WattsMATERIAL:AluminiumBATTERY:4.5 Ah 6.4 VLUMENS:425 LumensPV PANEL:4.5 Watts Grade AAUTONOMY:23 hoursCHARGING:6 hours / dayWARRANTY:3 Years



SOLAR WALL LIGHT

Professional Solar LED Wall light, strong lighting and fully automatic.



23 HOURS AUTONOMY

Smart power managment: 4 rainy days back up.



AUTOMATIC OPERATION

Fully automatic operation: Day & Night detection, automatic power On & Off.



ENVIRONMENT

Green energy: 0 carbon dioxide emissions.



LED LIGHTING

High brightness LED CLEE 36 pieces of 0.09W each with 50,000 hours life span.



SOLAR PANEL

4.5 W Monocrystalline Solar Panel, GRADE A Solar Cells.



LIFEPO4 BATTERY

Fast charging Lithium LIFePO₄ battery. working temperature - 15°+ 65°. Lifetime up to 12 Years



DIE CASTING ALUMINIUM

INTERPON AKZONOBEL painting, salt spray and corrosion resistant.



WATER PROOF












BUILT-IN SET SOLAR LAMP



PRODUCT CODE: SL-04-0001 DAY SL-04-0002 WARM







TECHNICAL SPECIFICATION

Aluminium LED POWER: 1.8 Watts MATERIAL:

BATTERY: 4.5Ah 6.4V LUMENS: 250 Lumens

PV PANEL: 3.5 Watts Grade A AUTONOMY: 23 hours

CHARGING: 6 hours / day WARRANTY: 3 Years



SOLAR BORDER LAMP

Solar LED Border lamp, strong lighting and fully automatic.



23 HOURS AUTONOMY

Smart power managment: 4 rainy days back up.



AUTOMATIC OPERATION

Fully automatic operation: Day & Night detection, automatic power On & Off.



ENVIRONMENT

Green energy: 0 carbon dioxide emissions.



LED LIGHTING

High brightness LED Cree 18 pieces of 0.09W each with 50,000 hours life span.



SOLAR PANEL

3.5W Monocrystalline Solar Panel, GRADE A Solar Cells.



LIFEPO4 BATTERY

Fast charging Lithium LIFePO₄ battery. working temperature - 15°+ 65°. Lifetime up to 12 Years.



DIE CASTING ALUMINIUM

INTERPON AKZONOBEL painting. Salt spray and corrosion resistant.



WATER PROOF
















PRODUCT CODE: SL-05-0001 DAY SL-05-0002 WARM



BATTERY:





425 Lumens

TECHNICAL SPECIFICATION

LUMENS:

LED POWER: 3.5 Watts MATERIAL: Aluminium

PV PANEL: 4.5 Watts Grade A AUTONOMY: 23 hours

4.5 Ah 6.4 V

CHARGING: 6 hours / day WARRANTY: 3 Years



SOLAR BOLLARD LAMP

Solar LED bollard lamp, strong lighting and fully automatic.



23 HOURS AUTONOMY

Smart power managment: 4 rainy days back up.



AUTOMATIC OPERATION

Fully automatic operation: Day & Night detection, automatic power On & Off.



ENVIRONMENT

Green energy: 0 carbon dioxide emissions.



LED LIGHTING

High Brightness LED Cree 36 Pieces of 0.09W each with 50,000 Hours Life Span.



SOLAR PANEL

4,5 W Monocrystalline Solar Panel, GRADE A Solar Cells.



LIFEPO4 BATTERY

Fast charging Lithium LIFePO₄ battery. working temperature - 15°+ 65°. Lifetime up to 12 Years.



DIE CASTING ALUMINIUM

INTERPON AKZONOBEL painting, Salt Spray and Corrosion Resistant.



WATER PROOF














BUILT-IN SET SOLAR LAMP



PRODUCT CODE: SL-05-0003 DAY





TECHNICAL SPECIFICATION

Aluminium LED POWER: 2.5 Watts MATERIAL: BATTERY: 4.5Ah 6.4V LUMENS: 320 Lumens

PV PANEL: 3.5 Watts Grade A AUTONOMY: 23 hours

CHARGING: 6 hours / day WARRANTY: 3 Years



SOLAR BOLLARD LAMP

Solar LED Bollard lamp, strong lighting and fully automatic.



23 HOURS AUTONOMY

Smart power managment: 4 rainy days back up.



AUTOMATIC OPERATION

Fully automatic operation: Day & Night detection, automatic power On & Off.



ENVIRONMENT

Green energy: 0 carbon dioxide emissions.



LED LIGHTING

High Brightness LED Cree 18 Pieces of 0.09W each with 50,000 hours life span.



SOLAR PANEL

3.5W Monocrystalline Solar Panel, GRADE A Solar Cells.



LIFEPO4 BATTERY

Fast charging Lithium LIFePO₄ battery. working temperature - 15°+ 65°. Lifetime up to 12 Years.



DIE CASTING ALUMINIUM

INTERPON AKZONOBEL painting, salt spray and corrosion resistant.



WATER PROOF



















PRODUCT CODE: SL-05-0004 DAY



TECHNICAL SPECIFICATION

LED POWER:1.8 WattsMATERIAL:AluminiumBATTERY:4.5 Ah 6.4 VLUMENS:250 LumensPV PANEL:3.5 Watts Grade AAUTONOMY:23 hoursCHARGING:6 hours / dayWARRANTY:3 Years



SOLAR BOLLARD LAMP

Solar LED Bollard lamp, strong lighting and fully automatic.



23 HOURS AUTONOMY

Smart power managment: 4 rainy days back up.



AUTOMATIC OPERATION

Fully automatic operation: Day & Night detection, automatic power On & Off.



ENVIRONMENT

Green energy: 0 carbon dioxide emissions.



LED LIGHTING

High Brightness LED Cree 18 Pieces of 0.09W each with 50,000 hours life Span.



SOLAR PANEL

3.5 W Monocrystalline Solar Panel, GRADE A Solar Cells.



LIFEPO4 BATTERY

Fast charging Lithium LIFePO₄ battery. working temperature - 15°+ 65°. Lifetime up to 12 Years.



DIE CASTING ALUMINIUM

INTERPON AKZONOBEL painting, salt spray and corrosion resistant.



WATER PROOF
















PRODUCT CODE:

SL-05-0006 DAY





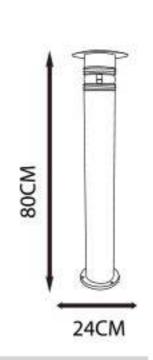

TECHNICAL SPECIFICATION

BATTERY: 4.5Ah 6.4V LUMENS: 250 Lumens

PV PANEL: 3.5 Watts Grade A AUTONOMY: 23 hours

CHARGING: 6 hours / day WARRANTY: 3 Years



SOLAR BOLLARD LAMP

Solar LED Bollard lamp, strong lighting and fully automatic.



23 HOURS AUTONOMY

Smart power managment: 4 rainy days back up.



AUTOMATIC OPERATION

Fully automatic operation: Day & Night detection, automatic power On & Off.



ENVIRONMENT

Green energy: 0 carbon dioxide emissions.



LED LIGHTING

High Brightness LED Cree 18 Pieces of 0.09W each with 50,000 hours life span.



SOLAR PANEL

3.5W Monocrystalline Solar Panel, GRADE A Solar Cells.



LIFEPO4 BATTERY

Fast charging Lithium LIFePO₄ battery. working temperature - 15°+ 65°. Lifetime up to 12 Years.



DIE CASTING ALUMINIUM

INTERPON AKZONOBEL painting, salt spray and corrosion resistant.



WATER PROOF
















BUILT-IN SET SOLAR LAMP



PRODUCT CODE: SL-05-0007 DAY





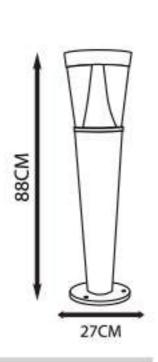

TECHNICAL SPECIFICATION

LED POWER: 3.5 Watts Aluminium MATERIAL:

BATTERY: 4.5 Ah 6.4 V LUMENS: 425 Lumens

PV PANEL: 3.5 Watts Grade A AUTONOMY: 23 hours

CHARGING: 6 hours / day WARRANTY: 3 Years



SOLAR BOLLARD LAMP

Solar LED Bollard lamp, strong lighting and fully automatic.



23 HOURS AUTONOMY

Smart power managment: 4 rainy days back up.



AUTOMATIC OPERATION

Fully automatic operation: Day & Night detection, automatic power On & Off.



ENVIRONMENT

Green energy: 0 carbon dioxide emissions.



LED LIGHTING

High Brightness LED Cree 18 Pieces of 0.09W each with 50,000 hours life span.



SOLAR PANEL

3.5 W Monocrystalline Solar Panel, GRADE A Solar Cells.



LIFEPO4 BATTERY

Fast charging Lithium LIFePO₄ battery. working temperature - 15°+ 65°. Lifetime up to 12 Years.



DIE CASTING ALUMINIUM

INTERPON AKZONOBEL painting, salt spray and corrosion resistant.



WATER PROOF













PRODUCT CODE: SL-05-0008 DAY SL-05-0009 WARM



TECHNICAL SPECIFICATION

LED POWER:4 WattsMATERIAL:AluminiumBATTERY:2 x 4.5Ah 6.4VLUMENS:500 LumensPV PANEL:7 Watts Grade AAUTONOMY:23 hoursCHARGING:6 hours / dayWARRANTY:3 Years



SOLAR BOLLARD LAMP

Solar LED Bollard lamp, strong lighting and fully automatic.



23 HOURS AUTONOMY

Smart power managment: 4 rainy days back up.



AUTOMATIC OPERATION

Fully automatic operation: Day & Night detection, automatic power On & Off.



ENVIRONMENT

Green energy: 0 carbon dioxide emissions.



LED LIGHTING

High Brightness LED Cree 44 Pieces of 0.09W each 50,000 hours life span.



SOLAR PANEL

7 W Monocrystalline Solar Panel, GRADE A Solar Cells.



LIFEPO4 BATTERY

Fast charging Lithium LIFePO₄ battery. working temperature - 15°+ 65°. Lifetime up to 12 Years.



DIE CASTING ALUMINIUM

INTERPON AKZONOBEL painting, salt spray and corrosion resistant.



WATER PROOF

















TECHNICAL SPECIFICATION

LED POWER: 2 x 3.5 Watts MATERIAL: Aluminium

BATTERY: 2 x 4.5 Ah 6.4 V **LUMENS:** 2 x 425 Lumens

PV PANEL: 2x4.5 Watts Grade A AUTONOMY: 23 hours

CHARGING: 6 hours / day WARRANTY: 3 Years



2.5 M. SOLAR POST LIGHT

Solar LED Post light, strong lighting and fully automatic.



23 HOURS AUTONOMY

Smart power managment: 4 rainy days back up.



AUTOMATIC OPERATION

Fully automatic operation: Day & Night detection, automatic power On & Off.



ENVIRONMENT

Green energy: 0 carbon dioxide emissions.



LED LIGHTING

High Brightness LED Cree, 50,000 hours life span.



SOLAR PANEL

2 x 4.5 W Monocrystalline Solar Panel, GRADE A Solar Cells.



LIFEPO4 BATTERY

Fast charging Lithium LIFePO₄ battery. working temperature - 15°+ 65°. Lifetime up to 12 Years.



DIE CASTING ALUMINIUM

INTERPON AKZONOBEL painting, salt spray and corrosion resistant.



WATER PROOF













TECHNICAL SPECIFICATION LED POWER: 2 x 3.5 Watts MATERIAL: Aluminium BATTERY: 2 x 4.5Ah 6.4V LUMENS: 2 x 425 Lumens PV PANEL: 2x3.5 Watts Grade A AUTONOMY: 23 hours CHARGING: 6 hours / day WARRANTY: 3 Years 2*3.5W = 20W = 60W BRIGHTNESS

2.5 M.

SOLAR POST LIGHT

Solar LED Post light, strong lighting and fully automatic.



23 HOURS AUTONOMY

Smart power managment: 4 rainy days back up.



AUTOMATIC OPERATION

Fully automatic operation: Day & Night detection, automatic power On & Off.



ENVIRONMENT

Green energy: 0 carbon dioxide emissions.



LED LIGHTING

High Brightness LED Cree, 50,000 hours life span.



SOLAR PANEL

2 x 35 W Monocrystalline Solar Panel, GRADE A Solar Cells.



LIFEPO4 BATTERY

Fast charging Lithium LIFePO₄ battery. working temperature - 15°+ 65°. Lifetime up to 12 Years.



DIE CASTING ALUMINIUM

INTERPON AKZONOBEL painting, salt spray and corrosion resistant.



WATER PROOF

















TECHNICAL SPECIFICATION

LED POWER: 15 Watts MATERIAL: Aluminium

BATTERY: 15Ah 12.8V LUMENS: 1520 Lumens

PV PANEL: 35 Watts Grade A AUTONOMY: 23 hrs.

BACK UP: 4 Days Back up Smart Mode 6 Days CHARGING: 6 hours / day

MOUNTING: 3.5 M.

HEIGHT

LIGHT

SPACE BETWEEN: 10-12 M.

2 M. w

WARRANTY: 3 Years

LED LIFE TIME: 50,000 Hrs.

3.5 M.

SOLAR POST LIGHT

Solar LED Post light, strong lighting and fully automatic.



23 HOURS AUTONOMY

Smart power managment: 4 rainy days back up.



AUTOMATIC OPERATION

Fully automatic operation: Day & Night detection, automatic power On & Off.



ENVIRONMENT

Green energy: 0 carbon dioxide emissions.



LED LIGHTING

15 W High Brightness LED Cree asymmetric lighting module PHILIPS LUXEON.



SOLAR PANEL

35 W Monocrystalline Solar Panel, GRADE A Solar Cells.



LIFEPO4 BATTERY

Lithium LIFEPO4 battery slow discharge for 4-5 days back up. Working temp. - 15°+ 65°, Lifetime up to 12 Years.



DIE CASTING ALUMINIUM

INTERPON AKZONOBEL painting, salt spray and corrosion resistant..



WATER PROOF













4-5 M.

SOLAR STREET LIGHT



PIR SENSOR DETECTOR

50% light level in idle state. 100% light outout when presence is detected.



SMART CONTROLLER

Smart Controller, Dimmable, Remote Control Monitoring, LED & Battery protection.



LED LIGHTING

15 Watts High effciency LED from PHILIPS LUXEON.



SOLAR PANEL

25 W Monocrystalline Solar Panel, GRADE A Solar Cells.



LIFEPO4 BATTERY

More than 24H autonomy with lithium 10Ah LIFePO₄ battery inside. 100% safe with no explosion risks.




MOUNTING SYSTEM


Easy to install. Thrity minutes or less installetion on wall and pole.



WATER PROOF

IP68 Compliant





MODEL: SL-07-0001/SL-07-0002 MOUNTING HEIGHT: 4-5 m

Grade A solar cells

SOLAR PANEL: 18V/25W SPACE BETWEEN LIGHT: 10-15 m

BATTERY TYPE: Lithium Life PO4 LAMP MATERIAL: Aluminium alloy 10Ah 12.8V

LED MAX POWER: 12V / 15W WARRANTY PERIOD: 3 years

LED CHIP BRAND: Philips LUXEON UNIT SIZE: 650x380x60 mm

LUMEN (LM): 1500 - 1650 lumens N.W: 8 kg

LIGHTING VIEWING ANGLE: 120° Q'TY/CTN: 1 set/ctn

(saving mode)

CHARGE TIME (BY SUN): 6-7 hours GW FOR CARTON: 9.5 kg

DISCHARGE TIME: Over 20 hours WORKING TEMP (°C): -20 to +60



















TECHNICAL SPECIFICATION

MODEL: SL-07-0003/SL-07-0004 MOUNTING HEIGHT: 6-7m

SOLAR PANEL: 18V/60W Grade A solar cells SPACE BETWEEN LIGHT: 20-25 m

BATTERY TYPE: Lithium Life PO4 LAMP MATERIAL: Aluminium alloy

21Ah 12.8V

LED MAX POWER: 12V / 30W WARRANTY PERIOD: 3 years

LED CHIP BRAND: Philips LUXEON UNIT SIZE: 1150x330x140mm

LUMEN (LM): 3600 - 3900 lumens **N.W:** 18.5 kg

LIGHTING VIEWING ANGLE: 120° Q'TY/CTN: 1 set/ctn

(saving mode)

CHARGE TIME (BY SUN): 6-7 hours GW FOR CARTON: 19 kg

DISCHARGE TIME: Over 20 hours WORKING TEMP (°C): -20 to +60

6-7 M.

SOLAR STREET LIGHT



PIR SENSOR DETECTOR

50% light level in idle state. 100% light outout when presence is detected.



SMART CONTROLLER

Smart Controller, Dimmable, Remote Control Monitoring, LED & Battery protection.



LED LIGHTING

30 Watts High effciency LED from PHILIPS LUXEON.



SOLAR PANEL

25 W Monocrystalline Solar Panel, GRADE A Solar Cells.



LIFEPO4 BATTERY

More than 24H autonomy with lithium 21Ah LIFEPO4 battery inside. 100% safe with no explosion risks.



MOUNTING SYSTEM

Easy to install. Thrity minutes or less installetion on wall and pole.



WATER PROOF

IP68 Compliant

PRODUCT CODE SL-07-0003 DAY SL-07-0004 WARM

















สอบกามรายละเอียดเพิ่มเติมได้ที่

Showroom @ CDC



